



3m/Elo Pog Wms FireLink Display 32 43inch Infrared Touch Screen Monitor With Led Light Bar

Our Product Introduction

for more products please visit us on anwelltouch.com

Basic Information

- Place of Origin: China
- Brand Name: Anwell Touch
- Certification: CE,Rohs,FCC
- Model Number: AW320IB-G802
- Minimum Order Quantity: 2 Pieces
- Price: Negotiable
- Packaging Details: Standard carton box
- Delivery Time: 15
- Payment Terms: TT
- Supply Ability: 5000 pieces per Month





Product Specification

- Series: Gaming
- Touch Type: Infrared
- Aspect Ratio: 16 : 9
- Screen Size: 32 Inch
- Touch Points: 10 Points
- Interface Type: D-SUB,DVI,Serial, Usb
- Resolution: 1920x1080
- Colors: 16.7M
- Viewing Angle: 85/85/80/80 (Typ.) (CR≥10)
- Response Time: 5 Ms
- Compatibility: Compatible 3M/ELO Microtouch Protocol
- Power Supply: AC 110~220 V
- Highlight: 43inch infrared touch screen monitor,
3m 4k touch screen monitor,
3m/elo 4k touch screen monitor



More Images



Product Description

Products Description



**32 43inch Infrared touch screen
game monitor with LED rings**


Touch Gaming monitor Feature:

- Compatible with 3M/ELOs protocol
- Touch signal input : RS232 / USB
- Signal input: VGA/DVI/HD-MI
- Support embedded rack mounted / VESA wall mounted
- AU,EU,US,UK plug available
- Application: Game machine,Interactive kiosk, Interactive digital signage,Industrial enclosure, Cabinet, In-wall devices

Product Parameters:

Anwell Model	<u>AW320IB-G802</u>
Monitor Color	Black
Aspect Ratio	16:10
Resolution	1920 x 1080
Colors	16.7 M
Active Area	698.4(W)×392.85(H) mm
Number of Touches	1 points.Touch Infrared Touch Screen
Brightness	300cd/m ²
Response Time	5 ms
Viewing Angle	89/89/89/89 (Typ.)(CR≥10)
Contrast Ratio	1000:1
Backlight Lifetime (hours)	LED / 50,000h
Touch Technology	1 points Infrared Touch
Touch Connector	RS232
Touch Panel Drivers	Compatible with 3M/ELO protocol
Touch Response Time	< 5ms
Power Supply	Input AC110 – 240V
Output	AC110 – 240V
Interface	VGA,HDMI,RS232
Power consumption	≤45W
Temperature	Operating 0°C – 50°C/Storage- 20°C – 60°C
Humidity Range (RH)	Operating 20%RH – 80%RH/Storage10%RH – 90%RH
Housing material	Metal or Aluminum (Optional)
Installation	75mm and 100mm VESA mount
Warranty(year)	1 Year
Support customization	

File Number: NO.2023-320IB-G802

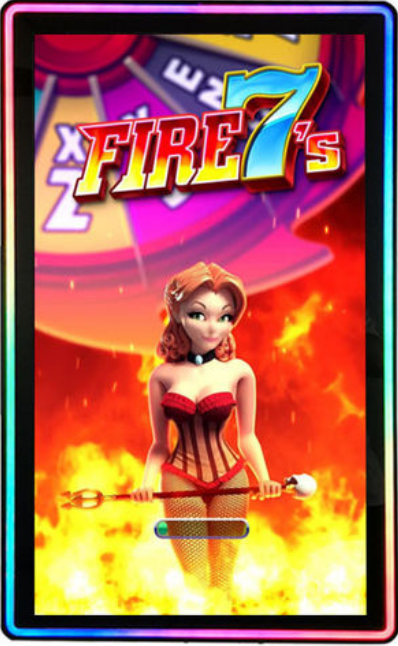



Shenzhen Anwell Touch Technology Co., Ltd.



+8615989592597



15989592597@163.com



anwelltouch.com

301, Building A, No. 51, Youganyuan Road, Anliang Community, Yuanshan Street, Shenzhen