

China

Anwell Touch

CE,RoHS,FCC

Negotiable

AW238CB-G803

Standard carton box

5000 pieces per Month

15 working days



23.8" PCAP 3M/ELO Touch Gaming Monitor Side LED Bar For Slot Gaming

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 2 Pieces
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms: TT
- Supply Ability:



Product Specification

- Aspect Ratio: 16:9
 Resolution: 1920 X 10
 Interface Type: DVI, Serial
 Response Time: 5ms
 Contrast Ratio: 1000:1
 Brightness: 300cd/m2
 Type: Capacitive
 Colors: 16.7M
 Viewing Angle: 85/85/80/8
 Touch Technology: 10 Points
- Warranty:
- Interface:
- Highlight:
- 1920 X 1080 DVI, Serial, Usb 5ms 1000:1 300cd/m2 Capacitive Touch 16.7M 85/85/80/80 (Typ.)(CR≥10) 10 Points Multi-Touch Capacitive Touch Screen 1 Year VGA,HD-MI,USB,DC



3m/elo touch gaming monitor, touch gaming monitor side led, pcap gaming touch monitor

More Images









Product Description

23.8" PCAP 3M/ELO Touch Gaming Monitor Side LED-Bar For Slot Gaming

Product Description


23.8 inch Capacitive touch screen gaming monitor

Touch Gaming monitor Feature:

- Compatible with 3M/ELOs protocol
- Touch signal input : RS232 / USB
- Signal input: VGA/DVI/HD-MI
- Support embedded rack mounted / VESA wall mounted
- AU, EU, US, UK plug available
- Application: Game machine, Interactive kiosk, Interactive
- digital signage, Industrial enclosure, Cabinet, In-wall devices.

Specifications 23.8Inch Capacitive Touch Monitor Data AW238CB-G803 Model Monitor Color Black Resolution 1920 x 1080 Colors 16.7 million Number of Touches Single-touch (multitouch optional) Brightness 300cd/m² 5 msec Response 178/178(°) Viewing Angle Contrast Ratio 1000:1 Backlight Lifetime (hours) LED / 50,000h Touch Technology Capacitive touch **Touch Connector** USB/RS232 **Touch Panel Drivers** compatible with 3M/ELO protocol Touch Life (Contacts) Unlimited 7H Surface Hardness Power Supply Input AC110 ~ 240V DC12V Output Frenquency 60Hz-75Hz 25W Power consumption **Operating Temperature** -10 ~ +65(°C) Humidity Range (RH) 10%-90% Housing material Metal or Aluminum Mounting 75mm and 100mm VESA mount; Rear mount ; Flush mount with included brackets



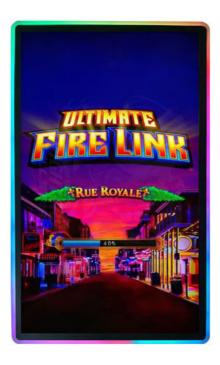



301, Building A, No. 51, Youganyuan Road, Anliang Community, Yuanshan Street, Shenzhen