



## WMS/POG/Firelink Game Infrared Touch Screen Monitor 32 inch With LED Side Light

Our Product Introduction

for more products please visit us on [anwelltouch.com](http://anwelltouch.com)

### Basic Information

- Place of Origin: China
- Brand Name: Anwell Touch
- Certification: CE,Rohs,FCC
- Model Number: AW320IB-G801
- Minimum Order Quantity: 2 Pieces
- Price: Negotiable
- Packaging Details: Standard carton box
- Delivery Time: 15 working days
- Payment Terms: TT
- Supply Ability: 5000 pieces per Month





### Product Specification

- Series: For Gaming
- Touch Type: Infrared
- Aspect Ratio: 16:9
- Screen Size: 32 Inches
- Touch Points: 10 Points
- Interface Type: D-SUB, DVI, Serial, Usb
- Resolution: 1920x1080
- Colors: 16.7M
- Viewing Angle: 85/85/80/80 (Typ.)(CR≥10)
- Response Time: 5ms
- Compatibility: Compatible 3M/ELO Microtouch Protocol
- Power Supply: AC110~220V
- Application: Gaming
- Interface: USB/RS232
- Highlight: infrared touch screen monitor 32 inch,




### More Images



## Product Description

## Products Description



**32inch Infrared touch screen game monitor with LED rings**
**Touch Gaming monitor Feature:**

- Compatible with 3M/ELOs protocol
- Touch signal input : RS232 / USB
- Signal input: VGA/DVI/HD-MI
- Support embedded rack mounted / VESA wall mounted
- AU,EU,US,UK plug available
- Application: Game machine,Interactive kiosk, Interactive digital signage,Industrial enclosure, Cabinet, In-wall devices

**Specifications**
**32Inch Infrared Touch Monitor with LED rings Data**

Model	AW320IB-G801
Monitor Color	Black
Resolution	1920 x 1080
Colors	16.7 million
Number of Touches	Single-touch ( multitouch optional)
Brightness	300cd/m <sup>2</sup>
Response	5 msec
Viewing Angle	178/178(°)
Contrast Ratio	1000:1
Backlight Lifetime (hours)	LED / 50,000h
Touch Technology	Infrared touch
Touch Connector	VGA/HD-MI/USB/RS232/DVI
Touch Panel Drivers	compatible with 3M/ELO protocol
Touch Life (Contacts)	Unlimited

Surface Hardness	7H
Power Supply	Input AC110 ~ 240V
Output	AC110 ~ 240V or 12V
Frenquency	60Hz-75Hz
Power consumption	25W
Operating Temperature	-10 ~ +65(°C)
Humidity Range (RH)	10%-90%
Housing material	Metal or Aluminum
Mounting	75mm and 100mm VESA mount; Rear mount ; Flush mount with included brackets

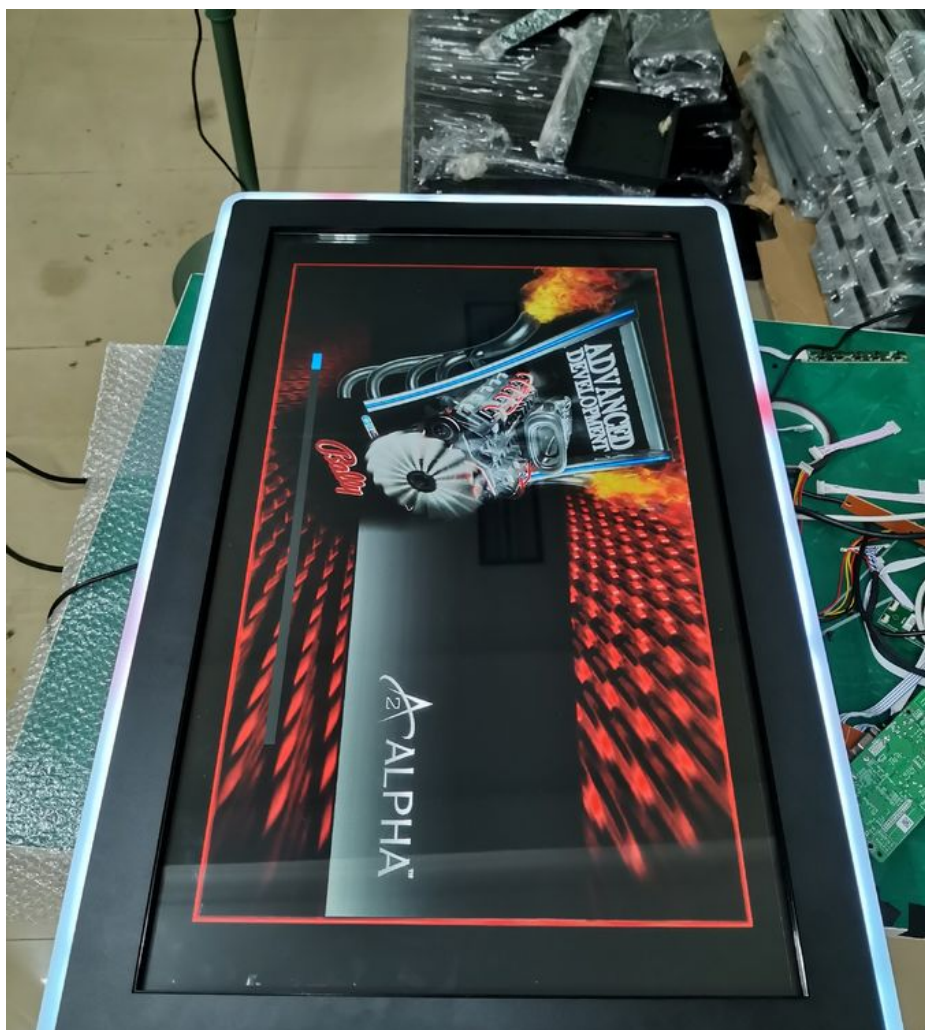



[drawing of AW320IB-G801.pdf](#)



**Shenzhen Anwell Touch Technology Co., Ltd.**



+8615989592597



15989592597@163.com



anwelltouch.com

301, Building A, No. 51, Youganyuan Road, Anliang Community, Yuanshan Street, Shenzhen