



## Multi Capacitive Touch Screen 21.5inch With Side Edge LED Bezel For Industrial Enclosures

Our Product Introduction

for more products please visit us on [anwelltouch.com](http://anwelltouch.com)

### Basic Information

- Place of Origin: China
- Brand Name: Anwell Touch
- Certification: CE,RoHS,FCC
- Model Number: AW215CB-G805
- Minimum Order Quantity: 2 Pieces
- Price: Negotiable
- Packaging Details: Standard carton box
- Delivery Time: 15 working days
- Payment Terms: TT
- Supply Ability: 5000 pieces per Month





### Product Specification

- Aspect Ratio: 16:9
- Resolution: 1920x1080
- Interface Type: DVI, Serial, Usb
- Response Time: 5ms
- Contrast Ratio: 1000:1
- Brightness: 300cd/m2
- Type: Capacitive Touch
- Colors: 16.7M
- Viewing Angle: 85/85/80/80 (Typ.)(CR≥10)
- Touch Technology: 10 Points Multi-Touch Capacitive Touch Screen
- Warranty: 1 Year
- Interface: VGA,HD-MI,USB,DC
- Highlight: multi capacitive touch screen 21.5inch,  
21.5inch capacitive touch screen monitor,  
led bezel multi capacitive touch screen



### More Images



Our Product

### Product Description

21.5inch Capacitive Touch Gaming Monitor With Side Edge LED Bezel For Industrial Enclosures

### Product Description




## 21.5inch Capacitive touch screen game monitor

### Touch Gaming monitor Feature:

- Compatible with 3M/ELOs protocol
- Touch signal input : RS232 / USB
- Signal input: VGA/DVI/HD-MI
- Support embedded rack mounted / VESA wall mounted
- AU,EU,US,UK plug available
- Application: Game machine,Interactive kiosk, Interactive digital signage,Industrial enclosure, Cabinet, In-wall devices

Specifications	
21.5 Inch Capacitive Touch Monitor Data	
Model	AW215CB-G805
Monitor Color	Black
Resolution	1920 x 1080
Colors	16.7 million
Number of Touches	Single-touch ( multitouch optional)
Brightness	300cd/m <sup>2</sup>
Response	5 msec
Viewing Angle	178/178(°)
Contrast Ratio	1000:1
Backlight Lifetime (hours)	LED / 50,000h
Touch Technology	Capacitive touch
Touch Connector	USB/RS232
Touch Panel Drivers	compatible with 3M/ELO protocol
Touch Life (Contacts)	Unlimited
Surface Hardness	7H
Power Supply	Input AC110 ~ 240V
Output	DC12V
Frenquency	60Hz-75Hz
Power consumption	25W
Operating Temperature	-10 ~ +65(°C)
Humidity Range (RH)	10%-90%
Housing material	Metal or Aluminum
Mounting	75mm and 100mm VESA mount; Rear mount ; Flush mount with included brackets

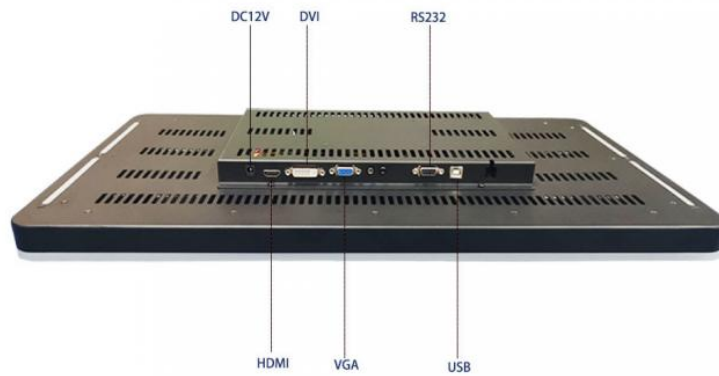



**Shenzhen Anwell Touch Technology Co., Ltd.**



+8618420495337



jasssiieee@gmail.com



anwelltouch.com

301, Building A, No. 51, Youganyuan Road, Anliang Community, Yuanshan Street, Shenzhen